

MULTOTEC

Polyurethane Flood and Spray Nozzles



Your Specialist in Screening Media




Polyurethane Flood and Spray Nozzles

Flood Nozzles


Multotec's Flood Nozzle design reduces downtime and ensures constant, efficient operation. Multotec Flood Nozzles are manufactured from abrasion resistant polyurethane, ensuring long life. They replace two or three conventional spray nozzles with one, by utilising a 120 degree spray angle.

The orifice diameter for standard sizes (Heavy Duty 18 mm and 10 mm) facilitates uninterrupted flow by reducing blockage problems from contaminated water.

Mounting


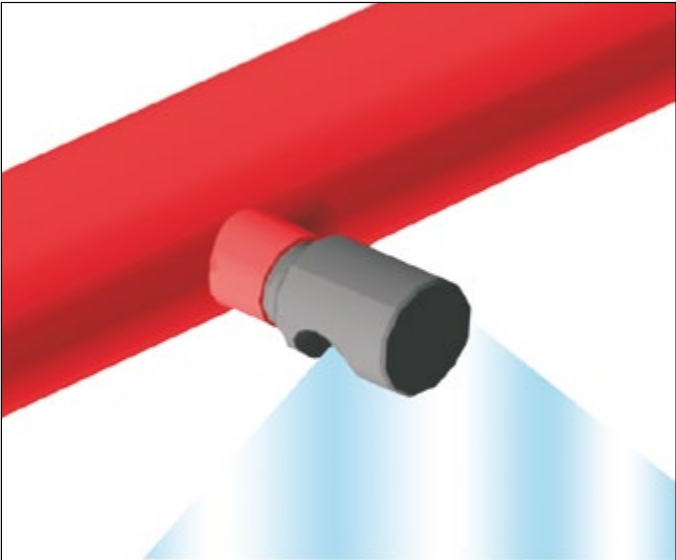


The Flood Nozzle can be mounted horizontally behind the pipe spray, reducing the possibility of damage or loss by positioning the nozzle out of the flow of the screen material.


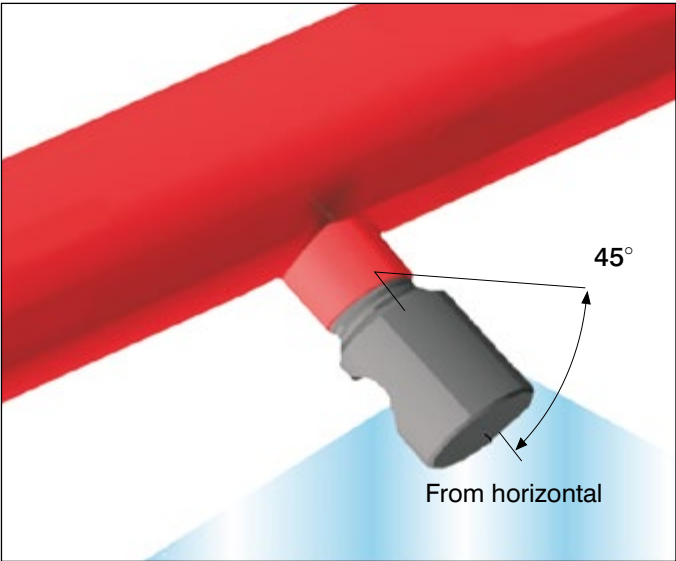


The Flood Nozzle can be mounted at an angle of up to 45 degrees into the flow to tumble material and to improve screening efficiency


Micro Flood Nozzle

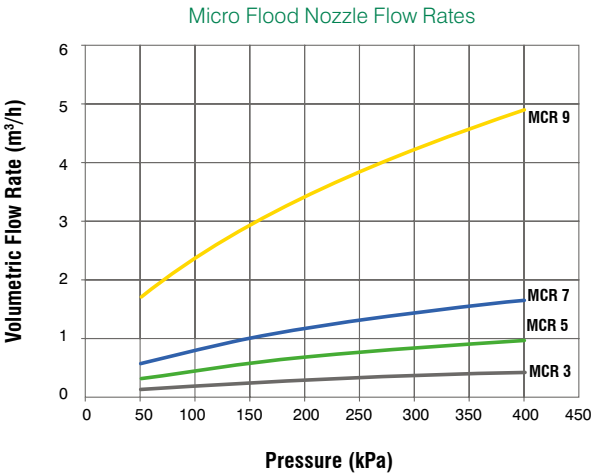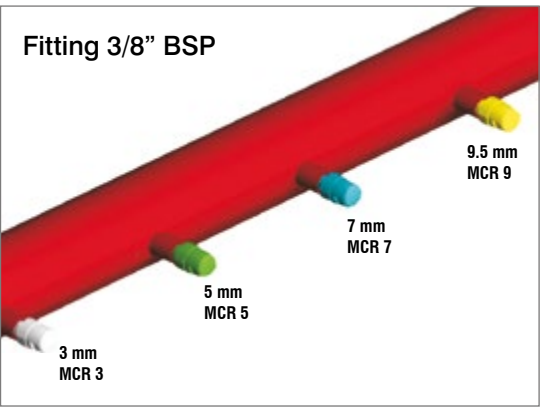


Mini Flood Nozzle

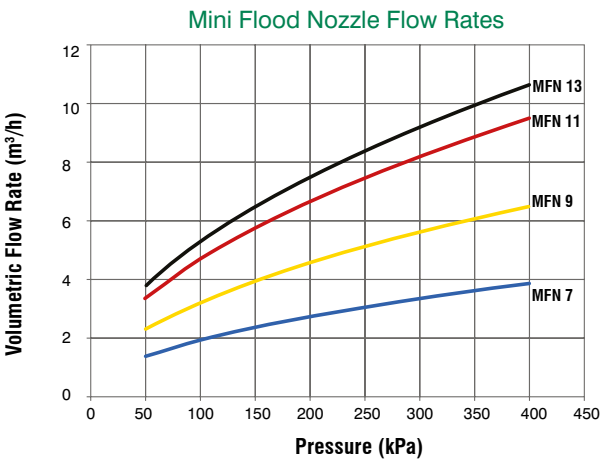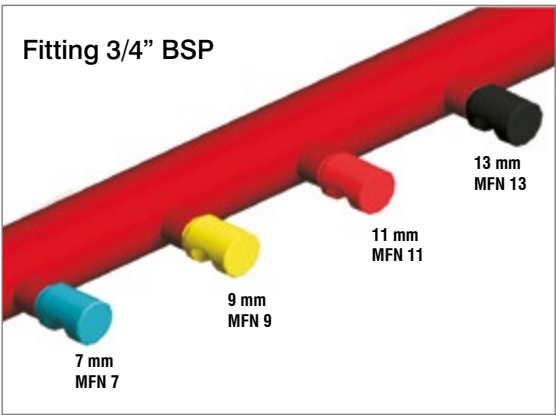

Heavy Duty Flood Nozzle

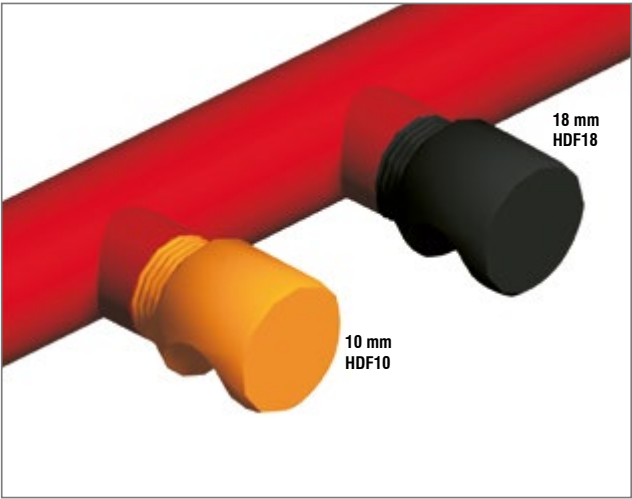


Heavy Duty Flood Nozzle Flow Rates

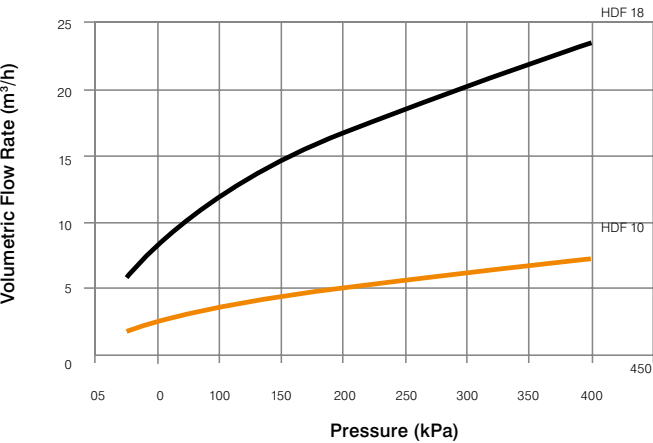


Flood Nozzle Spray Widths

		Spray Widths 'b' (mm)	
	Height 'a'	Installed horizontally	Installed at 45° from horizontal
MCR Nozzles	200	726	1 034
	300	1 072	1 524
	400	1 419	2 013
MFN Nozzles	200	753	1 118
	300	1 099	1 611
	400	1 445	2 102
HDF Nozzles	200	796	1 174
	300	1 143	1 663
	400	1 489	2 155

Installed horizontally




Installed at 45° from horizontal





Mafuta Extra Heavy Duty Flood Nozzle

The Multotec Extra Heavy Duty Flood Nozzle has been designed to cater for large volumes of water requirements in certain screening applications, utilising a 90 degree spray angle.

Mafuta with connecting flange and adaptor

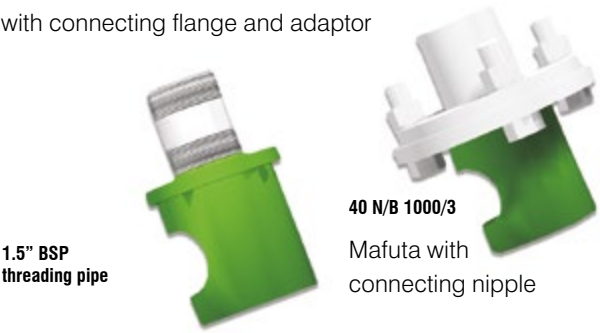

Mafuta Flood Nozzle Flow Rates

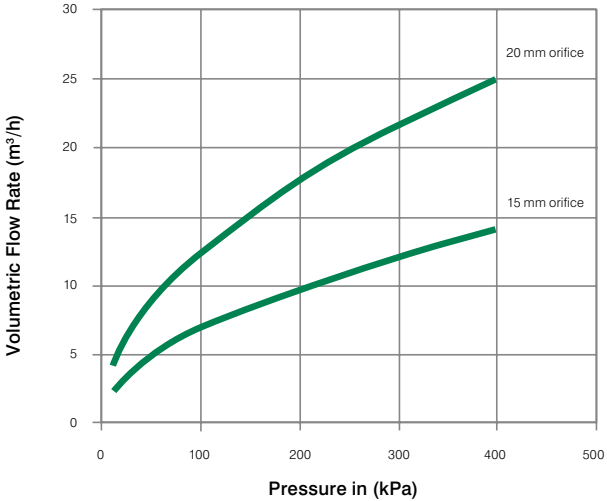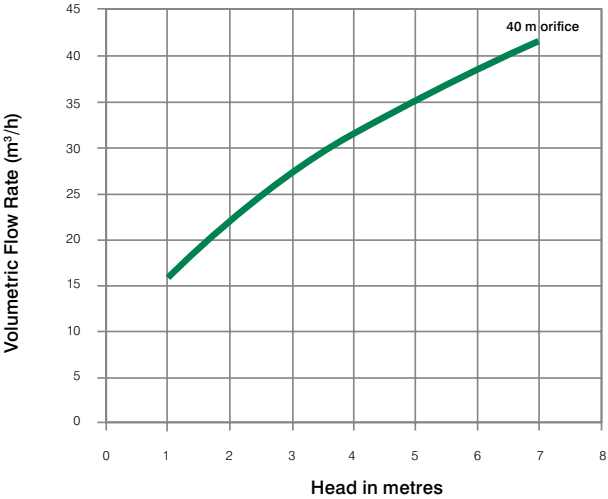


EHDF Nozzle Spray Widths

		Spray Widths 'b' (mm)	
	Height 'a'	Installed horizontally	Installed at 45° from horizontal
EHDF	200	480	572
	300	680	856
	400	880	1 138


Super Flood Nozzles

The Multotec Super Flood Nozzle has been designed to replace conventional flood boxes.


- No more silting up of the flood boxes - better access to panels
- Low pressure, high volume water curtain with no blockages
- Available in two sizes - 370 x 645 mm and 250 x 420 mm

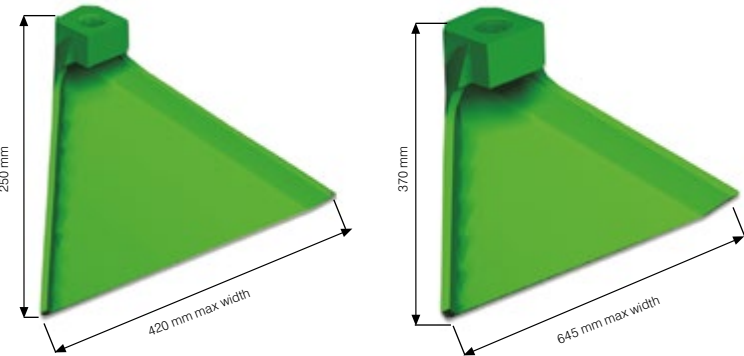

Flood box prone to silting with solids and media

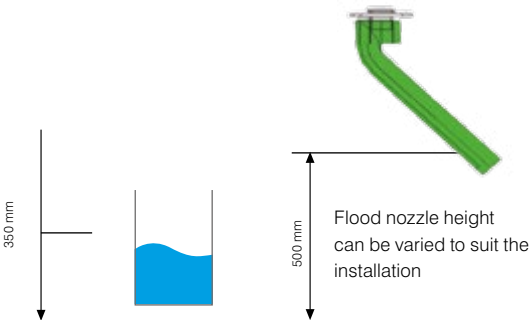

- The orifice diameter of 40 mm allows solids to pass through the screen

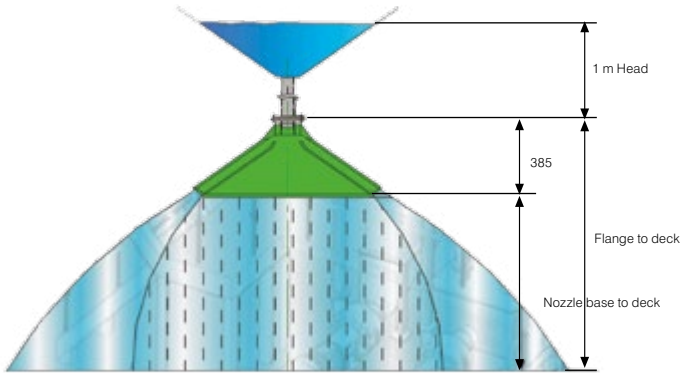

Normal Spray Curtain - Standard flow-rate: 16 m³/h

Spray widths (mm)

Flange to deck	Nozzle base to deck	Std Spread	Max Spread
685	300	895	1 296
785	400	960	1 449
885	500	1 015	1 586
1 085	700	1 080	1 817
1 285	900	1 100	2 000

Mounting Options




Loose flange and connecting pipe




1.5" BSP threaded pipe

1.5" BSP threaded nipple

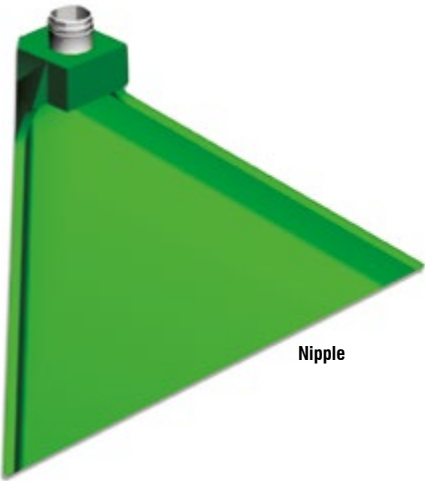


Super Flood Nozzle Flow Rate

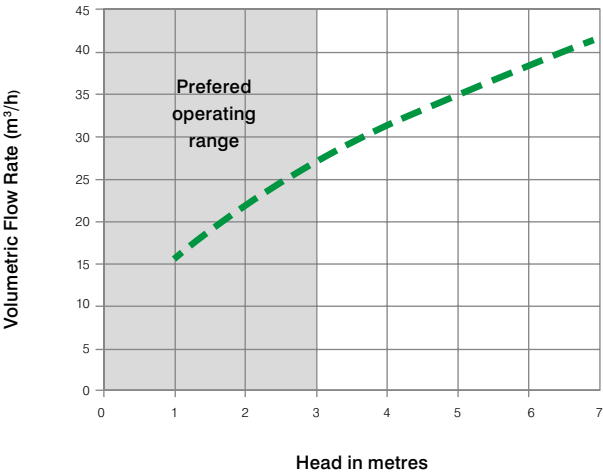


Spray Nozzles


Multospray Nozzle Identification

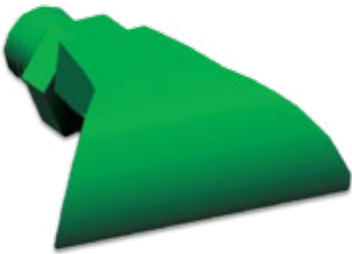

PDR 5 PDS 5

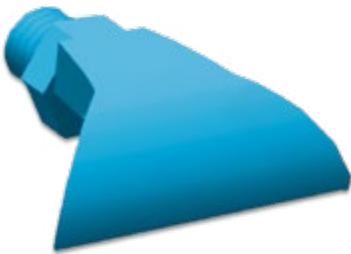

PDR 7 PDS 7

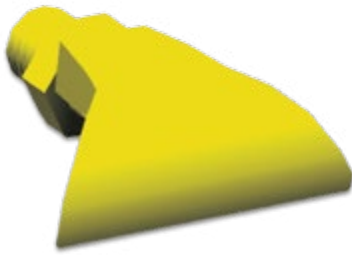

PDR 9 PDS 9




PDR 11 PDS 11

PDR = Round
PDS = Rectangular


Multospray Mounting Options



Multospray Nozzles are manufactured with a standard thread to fit a BSP 3/4" pipe socket.

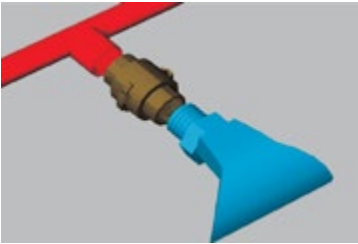

Quick release adaptors can be used in conjunction with Multospray, allowing for quick and easy installation.


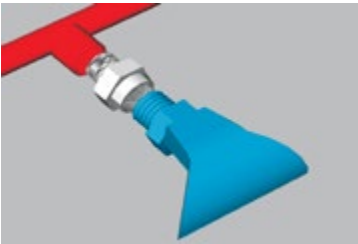


3/8" to 3/4" adaptors can be supplied with the Multospray where existing installations have a BSP 3/8" socket.

Multosprays have many applications including:


- Wet screening
- Ore washing
- Medium recovery
- Slimes removal
- Conveyor belt cleaning
- Cooling
- Orifices range from 5 mm to 11 mm
- Corrosion and wear resistant polyurethane
- Operating pressure range up to 4 bar
- Uniform water curtain with high operating efficiencies
- Standard fittings for easy installations

Multospray flow rates

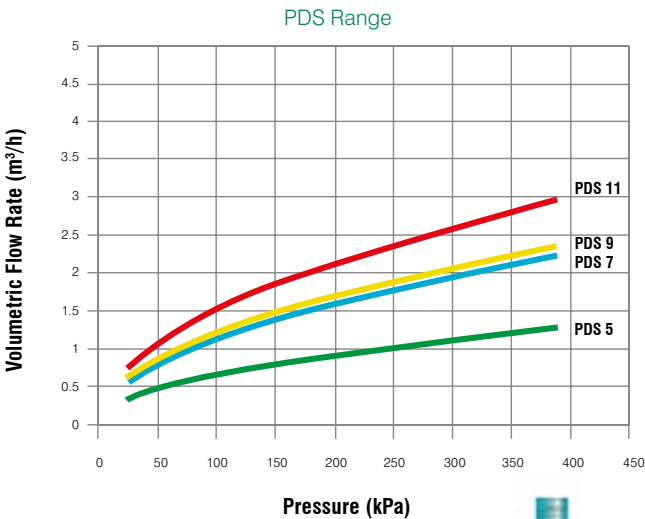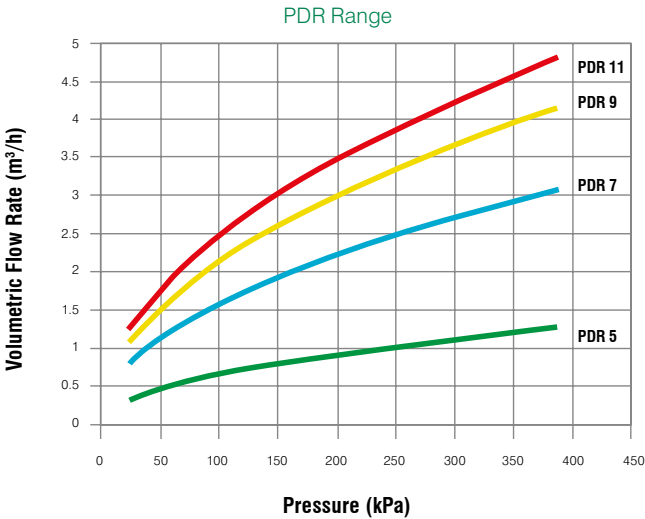


Operating width of Multosprays

Height 'a' (mm)		200	300	400
Spray Size PDR/PDS	Pressure (Bar)	Operating width of spray 'b' (mm)		
5	1.5	400	500	700
	2.5	500	600	800
7	1.5	350	450	500
	2.5	400	550	700
9	1.5	500	600	800
	2.5	600	700	1 000
11	1.5	500	600	800
	2.5	500	700	1 000

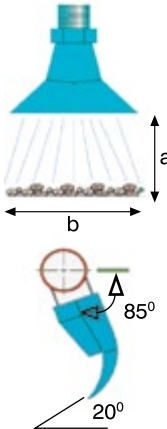

The Multospray Nozzles operate with maximum efficiency in the 1.5 to 2.5 bar pressure range.



MULTOTEC

Australia – Brisbane

Tel: +61 (7) 3442 0100
Fax: +61 (7) 3200 7733
Email: sales@multotec.com.au

Australia – Perth

Tel: +61 (8) 9406 3500
Fax: +61 (8) 9302 1732
Email: sales@multotec.com.au

Canada – Edmonton

Tel: +1 (780) 433 8825
Fax: +1 (780) 433 8836
Email: canada@multotec.com

Canada – Montréal

Tel: +1 (450) 651 5858 (ext. 203)
Fax: +1 (450) 651 0002
Email: canadam@multotec.com

Chile

Tel: +56 (2) 745 3317/3302
Fax: +56 (2) 745 3432
Email: chile@multotec.com

Botswana

Tel: +267 297 4524/4525
Email: botswana@multotec.com

Ghana

Tel: +233 302 517 821
Email: multotec@multotec.wa.com

Mozambique

Tel: +258 25 240057
Cell: +258 84 064 9544
Email: mozambique@multotec.com
moz@multotec.com

South Africa


Tel: +27 (0) 11 923 6000
Fax: +27 (0) 11 394 8701/5099
Email: marketing@multotec.com

Zambia

Tel: +260 212 313 354
Fax: +260 212 312 422
Email: multotec@multotec.co.zm

www.multotec.com

Screening Solutions	Mineral Processing Equipment	
Sampling Solutions	Wear Lining Solutions	Mill and Scrubber Linings
Solid / Liquid Separation Solutions	Conveyor System Solutions	
Pumps	Process Water Treatment and Metals Recovery	



Multotec products are subject to continuous development and Multotec reserves the right to make changes to the specifications and design of its products without prior notification.